


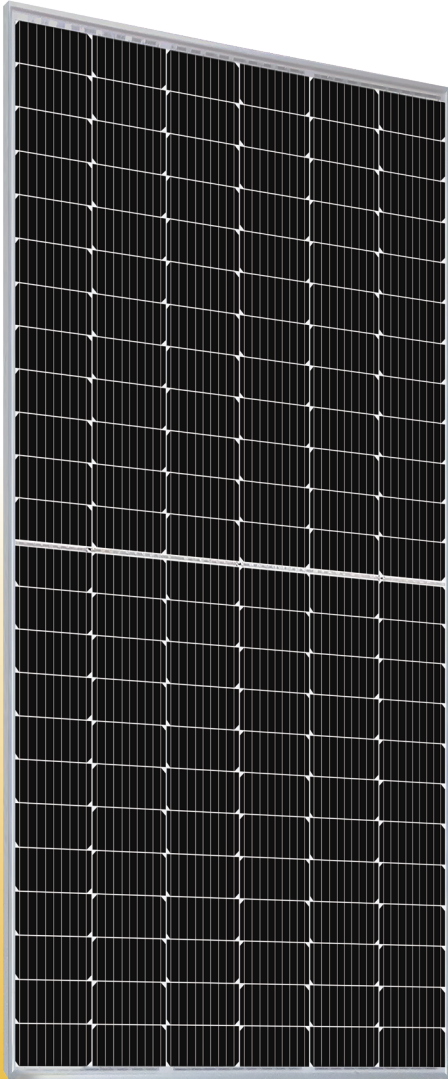

SkyHawk M-type Module Specification

Monocrystalline 6X24 Solar Modules for Salt Field Type

166mm / M6 Solar Cell

435~460Wp



Better LCOE



Multi Busbar Technology



Advanced Non-Destructive Cutting Technology



The toughest Salt Mist Test in PV Industry



The highest Mechanical Load Test in PV Industry



Improved module power output performance by reducing module working temperature

Green Energy

Made in Taiwan



Sustainable Development





SkyHawk M-type Module Specification(166mm / M6 Solar Cell)
Monocrystalline 6X24 Solar Modules for Salt Field Type
435-460Wp



Electrial Data									General Data	
Model Name		TS72-AMH-435 H1 TS72-AMH-440 H1 TS72-AMH-445 H1 TS72-AMH-450 H1 TS72-AMH-455 H1 TS72-AMH-460 H1							Cell type	M6 Monocrystalline
Max. power at STC	Pmax	W	435	440	445	450	455	460	Cell per module	Mono-crystalline silicon solar cell (144 pcs)
Max. power voltage	Vmp	V	40.90	41.10	41.30	41.50	41.70	41.90	Front	Low-iron tempered glass
Max. power current	Imp	A	10.64	10.71	10.78	10.85	10.92	10.99	Encapsulant Flim	Low water vapor transmission rate (WVTR) material
Open circuit voltage	Voc	V	48.70	48.90	49.10	49.30	49.50	49.70	Rear	Anti-Salt Mist composite film
Short circuit current	Isc	A	11.39	11.46	11.53	11.60	11.66	11.73	Frame	Anti-Salt Mist 6063T5 aluminum (silver/black)
Module Conversion Eff.		%	20.0%	20.2%	20.5%	20.7%	20.9%	21.2%	Junction Box	IP68
										
									Connector	EVO-2 Compatible
									Cable	1400mm / 4mm²
* Under Standard Test Condition(1,000W/m²,25°C,AM 1.5): Power Tolerance ±3%, Voc Tolerance ±3%, Isc Tolerance ±3% * Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m²) x 1000 (w/m²)))] x 100%										

Temperature Coefficient				Operation Conditions		Module Dimensions and Weight	
Nominal Operating Cell Temperature	NOCT	°C	45±2	Max. system voltage	1500V	Dimension	2094 x 1038 x 40 mm
TC Isc	α	%/ °C	0.06	Module fire resistance class	Class C	Weight	23.5Kg
TC Voc	β	%/ °C	- 0.31	Protection Class (IEC 61140)	Class II		
TC Pmax	γ	%/ °C	- 0.38	Series fuse rating	20 A		
				Number of bypass diodes	3		
				Temperature range	-40 to +85°C		
				Max. mechanical load	5400 pa(front side) 3600 Pa(rear side)		

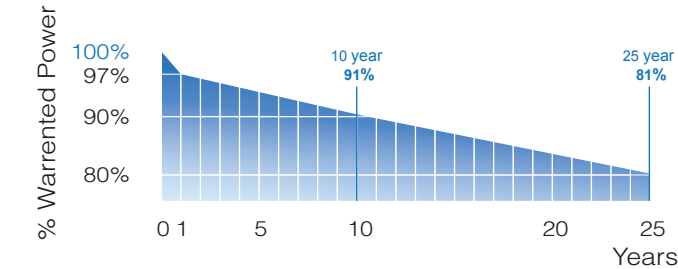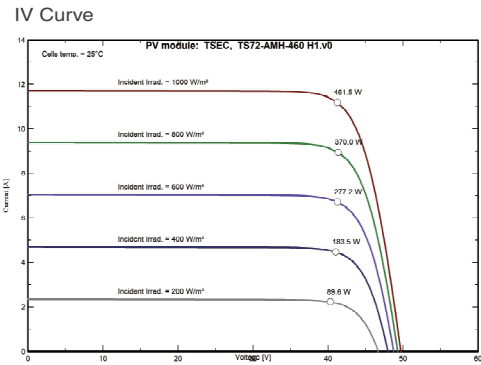


- Certifications
- IEC 61215:2016 、 IEC 61730-1:2016 & IEC 61730-2:2016
 - ISO 9001:2015 Quality management system
 - ISO 14001:2015 Environmental management system
 - ISO 45001:2018 Occupational health and safety management system



Management System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID: 9105085471



Engineering Drawing(mm)

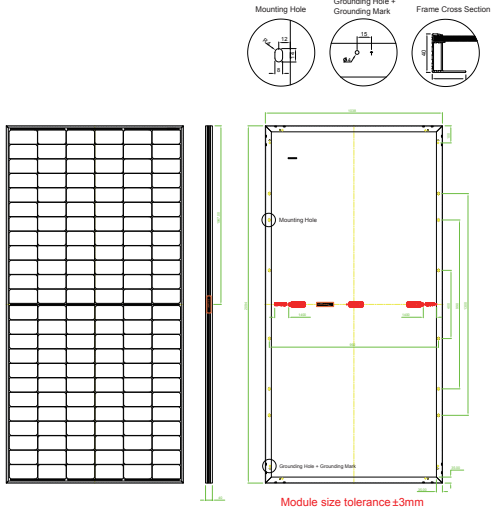

- Warranty
- 12-year materials and workmanship warranty
 - 25-year linear power warranty