



ALPHA N-Type High-Efficiency Module Specification

Monocrystalline 6X18 Solar Modules

425Wp~455Wp



Zero light-induced degradation



Better low light response



Additional power gain



The highest Mechanical Load Test in PV Industry



Better temperature coefficient



Lower LCOE



The toughest Salt Mist Test in PV Industry

Green Energy

Made in Taiwan



Sustainable Development



ALPHA N-Type High-Efficiency Module Specification

Monocrystalline 6X18 Solar Modules

425-455Wp



Electrical Data

Model Name	TS54-CMH-425 H1	TS54-CMH-430 H1	TS54-CMH-435 H1	TS54-CMH-440 H1	TS54-CMH-445 H1	TS54-CMH-450 H1	TS54-CMH-455 H1
Max. power at STC P _{max} W	425	430	435	440	445	450	455
Max. power voltage V _{mp} V	33.01	33.16	33.35	33.52	33.71	33.89	34.04
Max. power current I _{mp} A	12.90	12.98	13.06	13.14	13.22	13.30	13.38
Open circuit voltage V _{oc} V	38.87	39.06	39.25	39.44	39.63	39.82	40.01
Short circuit current I _{sc} A	13.48	13.57	13.66	13.75	13.84	13.93	14.02
Module Conversion Eff. %	21.8%	22.0%	22.3%	22.5%	22.8%	23.0%	23.3%

* Under Standard Test Condition(1,000W/m²,25°C,AM 1.5): Power Tolerance ±3%, Voc Tolerance ±3%, Isc Tolerance ±3%
 * Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m²) x 1000 (w/m²))] x 100%

General Data

Cell type	Monocrystalline N-Type solar cell
Cell per module	Mono-crystalline silicon N-Type solar cell (108 pcs)
Front	PV Coated glass
Encapsulant Film	Low water vapor transmission rate (WVTR) material
Rear	Backsheet (Inner side foil black)
Frame	Composites material frame
Junction Box	IP68
Connector	EVO-2 Compatible
Cable	1500mm / 12 AWG / 4mm ²



Temperature Coefficient

Nominal Operating Cell Temperature	NOCT	°C	45±2
TC Isc	α	%/°C	0.045
TC Voc	β	%/°C	-0.25
TC Pmax	γ	%/°C	-0.29

Operation Conditions


Max. system voltage	1500V
Module fire resistance class	Class C
Protection Class (IEC 61140)	Class II
Series fuse rating	30 A
Number of bypass diodes	3
Temperature range	-40 to +85°C
Max. mechanical load	5400 pa

* Please follow installation manual provided by TSEC

Module Dimensions and Weight

Dimension	1723 x 1134 x 35 mm
Weight	21.5 Kg

IV Curve


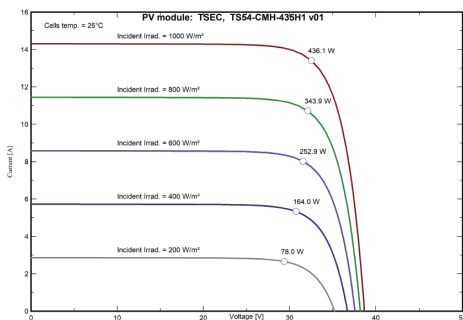


Certifications

- IEC 61215:2021 \ IEC 61730-1:2021 & IEC 61730-2:2021 \ UL 61730
- ISO 9001:2015 Quality management system
- ISO 14001:2015 Environmental management system
- ISO 45001:2018 Occupational health and safety management system



Engineering Drawing(mm)

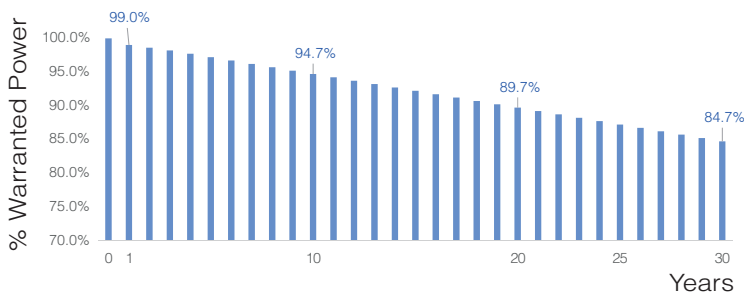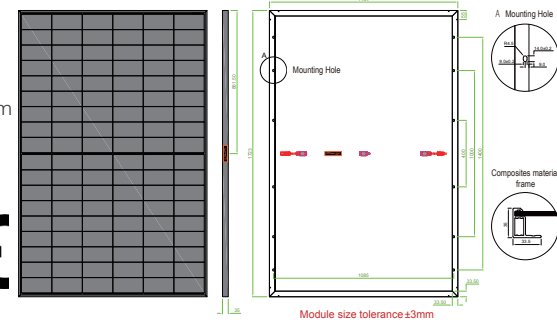

Warranty

- 12-year materials and workmanship warranty
- 30-year linear power warranty

Made in Taiwan

* The information in this document is subject to change without notice * TSEC reserves the rights of final interpretation and revision of datasheet
 * Version : Rev.13, May 2025

TSEC Corporation

Taipei Headquarters | 8F., No.225, Sec3, Beixin Rd., Xindian Dist., New Taipei City 23143, Taiwan, R.O.C

T +886-2-2912-2199 F +886-2-2917-5399 M international.sales@tsecpv.com(Sales Contact) epc@tsecpv.com(EPC Construction Service)