

## SkyHawk M-type Module Specification

Monocrystalline 6X24 Solar Modules for Salt Field Type

166mm / M6 Solar Cell

# 435~460Wp



**Better LCOE**



**Multi Busbar Technology**



**Advanced Non-Destructive Cutting Technology**



**The toughest Salt Mist Test in PV Industry**



**The highest Mechanical Load Test in PV Industry**



**Improved module power output performance by reducing module working temperature**

Green Energy

Made in Taiwan



Sustainable Development



# SkyHawk M-type Module Specification(166mm / M6 Solar Cell) Monocrystalline 6X24 Solar Modules for Salt Field Type 435-460Wp



Electrial Data								General Data		
Model Name	TS72-AMH-435 H1 TS72-AMH-440 H1 TS72-AMH-445 H1 TS72-AMH-450 H1 TS72-AMH-455 H1 TS72-AMH-460 H1							Cell type	M6 Monocrystalline	
Max. power at STC	P <sub>max</sub>	W	435	440	445	450	455	460	Cell per module	Mono-crystalline silicon solar cell (144 pcs)
Max. power voltage	V <sub>mp</sub>	V	40.90	41.10	41.30	41.50	41.70	41.90	Front	Low-iron tempered glass
Max. power current	I <sub>mp</sub>	A	10.64	10.71	10.78	10.85	10.92	10.99	Encapsulant Film	Low water vapor transmission rate (WVTR) material
Open circuit voltage	V <sub>oc</sub>	V	48.70	48.90	49.10	49.30	49.50	49.70	Rear	Anti-Salt Mist composite film
Short circuit current	I <sub>sc</sub>	A	11.39	11.46	11.53	11.60	11.66	11.73	Frame	Anti-Salt Mist 6063T5 aluminum (silver/black)
Module Conversion Eff.	%		20.0%	20.2%	20.5%	20.7%	20.9%	21.2%	Junction Box	IP68
* Under Standard Test Condition(1,000W/m <sup>2</sup> ,25°C,AM 1.5): Power Tolerance ±3%										
* Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m <sup>2</sup> ) x 1000 (w/m <sup>2</sup> ))] x 100%										
									Connector	EVO-2 Compatible
									Cable	1400mm / 4mm <sup>2</sup>

### Temperature Coefficient


Nominal Operating Cell Temperature	NOCT	°C	45±2
TC I <sub>sc</sub>	α	%/ °C	0.06
TC V <sub>oc</sub>	β	%/ °C	- 0.31
TC P <sub>max</sub>	γ	%/ °C	- 0.38

### Operation Conditions



Max. system voltage	1500V
Module fire resistance class	Class C
Protection Class (IEC 61140)	Class II
Series fuse rating	20 A
Number of bypass diodes	3
Temperature range	-40 to +85°C
Max. mechanical load	5400 pa(front side) 3600 Pa(rear side)

### Module Dimensions and Weight

Dimension	2094 x 1038 x 40 mm
Weight	23.5Kg

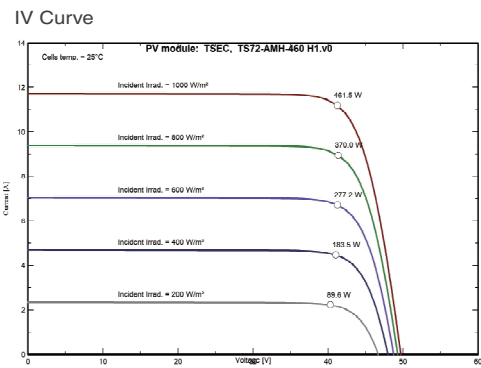

- ### Certifications
- IEC 61215:2016、IEC 61730-1:2016 & IEC 61730-2:2016
  - ISO 9001:2015 Quality management system
  - ISO 14001:2015 Environmental management system
  - ISO 45001:2018 Occupational health and safety management system

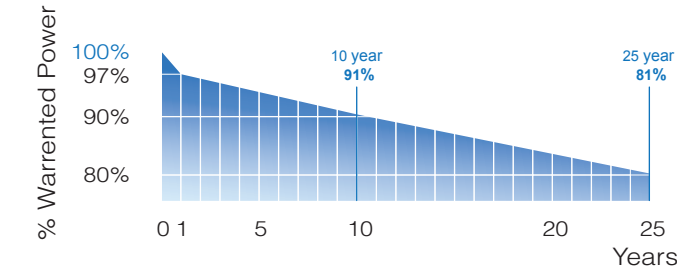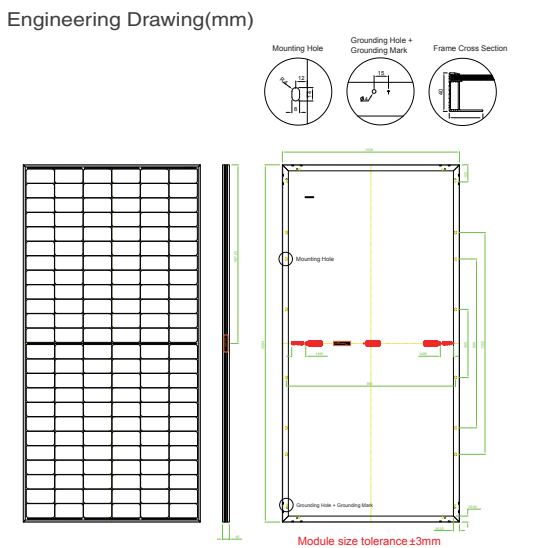

**Made in Taiwan** \* The information in this document is subject to change without notice \* TSEC reserves the rights of final interpretation and revision of datasheet \* Version : Rev.4, March 2023