

Aegis R-type Module Specification

Monocrystalline 6X24 Solar Modules for Rooftop Type

385-415Wp




Electrial Data

Model Name	TS72-6MH-385 H1	TS72-6MH-390 H1	TS72-6MH-395 H1	TS72-6MH-400 H1	TS72-6MH-405 H1	TS72-6MH-410 H1	TS72-6MH-415 H1
Max. power at STC	Pmax W	385	390	395	400	405	415
Max. power voltage	Vpmax V	40.37	40.42	40.48	40.52	40.55	40.61
Max. power current	Ipmax A	9.54	9.66	9.77	9.88	9.99	10.24
Open circuit voltage	Voc V	47.29	47.52	47.71	47.95	48.17	48.59
Short circuit current	Isc A	10.21	10.29	10.37	10.44	10.51	10.65
Module Conversion Eff.	%	18.95%	19.19%	19.44%	19.68%	19.93%	20.42%

* Under Standard Test Condition(1,000W/m²,25°C,AM 1.5): Power Tolerance ±3%
 * Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m²) x 1000 (w/m²))] x 100%

General Data

Cell type	6" Monocrystalline
Cell per module	Mono-crystalline silicon solar cell (144 pcs)
Front	Low-iron tempered glass
Encapsulant Film	Ethylene Vinyl Acetate(EVA)
Rear	Composite film
Frame	Anti-Salt Mist 6063T5 aluminum (silver / black)
Junction Box	IP68
Connector	EVO-2 / EVO-2 Compatible
Cable	1200mm / 12 AWG / 4mm ²



Operation Conditions

Max. system voltage	1500V
Module fire resistance class	Class C
Protection Class (IEC 61140)	Class II
Series fuse rating	15 A
Number of bypass diodes	3
Temperature range	-40 to +85°C
Max. mechanical load	5400 pa(front side) 3600 Pa(rear side)


Temperature Coefficient

Nominal Operating	NOCT	°C	43±2
Cell Temperature			
TC Isc	α	%/°C	+0.06
TC Voc	β	%/°C	-0.3
TC Pmax	γ	%/°C	-0.38

Module Dimensions and Weight

Dimension	2,028 x 1002 x 40 mm
Weight	23Kg

Engineering Drawing(mm)

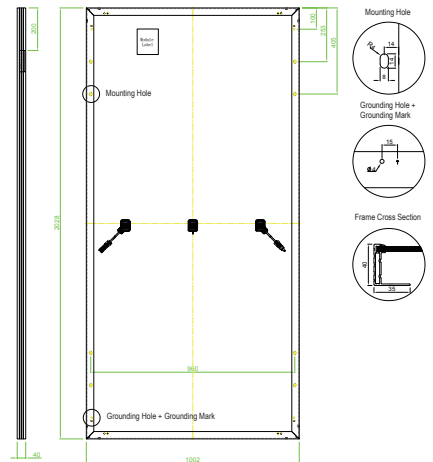


Certifications

- IEC 61215:2016 、 IEC 61730-1:2016 & IEC 61730-2:2016
- ISO 9001:2015 Quality management system
- ISO 14001:2015 Environmental management system
- ISO 45001:2018 Occupational health and safety management system




Management System
 ISO 9001:2015
 ISO 14001:2015
 ISO 45001:2018
 www.tuv.com
 ID: 9105065471

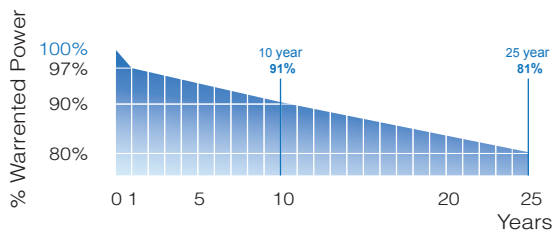

Warranty
 • 12-year materials and workmanship warranty
 • 25-year linear power warranty

IV Curve

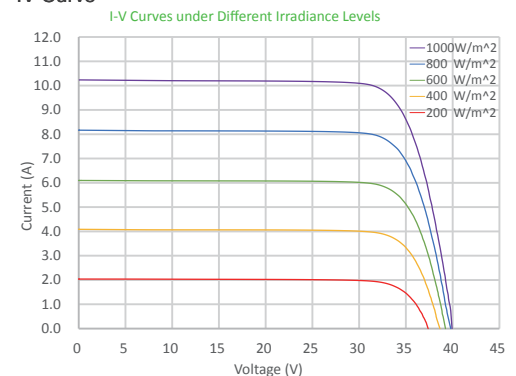

Made in Taiwan

* The information in this document is subject to change without notice * TSEC reserves the rights of final interpretation and revision of datasheet

* Version : March 2022

TSEC Corporation

Taipei Headquarters | 8F., No.225, Sec3, Beixin Rd., Xindian Dist., New Taipei City 23143, Taiwan, R.O.C

T +886-2-2912-2199 F +886-2-2917-5399 M international.sales@tsecpv.com(Sales Contact) epc@tsecpv.com(EPC Construction Service)