



QUANTUM TOPCon Module Specification

Monocrystalline 6X20 Solar Modules

182mm Solar Cell

475Wp~505Wp



Zero light-induced degradation



Better low light response



Additional power gain



The highest Mechanical Load Test in PV Industry



Better temperature coefficient



Lower LCOE



The toughest Salt Mist Test in PV Industry

Green Energy

Made in Taiwan



Sustainable Development



QUANTUM TOPCon Module Specification(182mm Solar Cell)

Monocrystalline 6X20 Solar Modules


475-505Wp



Electrical Data										General Data	
Model Name			TS60-CMH-475 H1	TS60-CMH-480 H1	TS60-CMH-485 H1	TS60-CMH-490 H1	TS60-CMH-495 H1	TS60-CMH-500 H1	TS60-CMH-505 H1	Cell type	Monocrystalline TOPCon solar cell
Max. power at STC	Pmax	W	475	480	485	490	495	500	505	Cell per module	Mono-crystalline silicon TOPCon solar cell (120 pcs)
Max. power voltage	Vmp	V	36.12	36.26	36.45	36.64	36.83	37.02	37.2	Front	PV Coated glass
Max. power current	Imp	A	13.16	13.24	13.32	13.4	13.48	3.56	13.64	Encapsulant Film	Low water vapor transmission rate (WVTR) material
Open circuit voltage	Voc	V	42.54	42.73	42.92	43.11	43.3	43.49	43.68	Rear	Backsheet
Short circuit current	Isc	A	13.83	13.92	14.01	14.10	14.19	14.28	14.37	Frame	Anti-Salt Mist frame
Module Conversion Eff.		%	22.0%	22.2%	22.4%	22.6%	22.9%	23.1%	23.3%	Junction Box	IP68
											
* Under Standard Test Condition(1,000W/m²,25°C,AM 1.5): Power Tolerance ±3% * Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m²) x 1000 (w/m²)))] x 100% * Product specifications and data are subject to change without prior notice.										Connector	EVO-2 Compatible
										Cable	1500mm / 12 AWG / 4mm²

Temperature Coefficient				Operation Conditions		Module Dimensions and Weight	
Nominal Operating	NOCT	°C	45±2	Max. system voltage	1500V	Dimension	1908 x 1134 x 35 mm
Cell Temperature				Module fire resistance class	Class C	Weight	23.5 Kg
TC Isc	α	%/ °C	+0.045	Protection Class (IEC 61140)	Class II		
TC Voc	β	%/ °C	- 0.25	Series fuse rating	25 A		
TC Pmax	γ	%/ °C	- 0.29	Number of bypass diodes	3		
				Temperature range	-40 to +85°C		
				Max. mechanical load	5400 pa		
				* Please follow installation manual provided by TSEC			

IV Curve

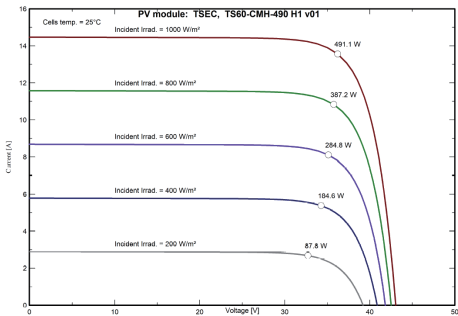



Certifications

- IEC 61215:2021、IEC 61730-1:2021 & IEC 61730-2:2021、UL 61730
- ISO 9001:2015 Quality management system
- ISO 14001:2015 Environmental management system
- ISO 45001:2018 Occupational health and safety management system



★ Certification is in progress

Engineering Drawing(mm)

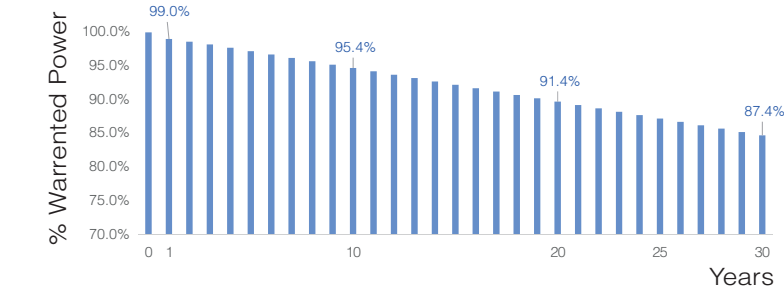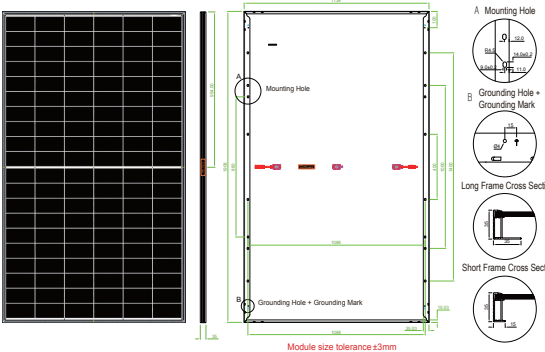

Warranty

- 12-year materials and workmanship warranty
- 30-year linear power warranty

★ The temporary data sheet is still under development.

Made in Taiwan

* The information in this document is subject to change without notice

* TSEC reserves the rights of final interpretation and revision of datasheet

* Version : Rev.11, November 2024

TSEC Corporation

Taipei Headquarters I 8F., No.225, Sec3, Beixin Rd., Xindian Dist., New Taipei City 23143, Taiwan, R.O.C

T +886-2-2912-2199 F +886-2-2917-5399 M international.sales@tsecpv.com(Sales Contact) epc@tsecpv.com(EPC Construction Service)