



## ALPHA N-Type High-Efficiency Module Specification

Monocrystalline 6X20 Solar Modules

# 475Wp~505Wp



Zero light-induced degradation



Better low light response



Additional power gain



The highest Mechanical Load Test in PV Industry



Better temperature coefficient



Lower LCOE



The toughest Salt Mist Test in PV Industry

Green Energy

Made in Taiwan



Sustainable Development



# ALPHA N-Type High-Efficiency Module Specification

## Monocrystalline 6X20 Solar Modules

### 475-505Wp



### Electrical Data

| Model Name             | TS60-CMH-475 H1 | TS60-CMH-480 H1 | TS60-CMH-485 H1 | TS60-CMH-490 H1 | TS60-CMH-495 H1 | TS60-CMH-500 H1 | TS60-CMH-505 H1 |
|------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. power at STC      | Pmax W          | 475             | 480             | 485             | 490             | 495             | 500             |
| Max. power voltage     | Vmp V           | 36.12           | 36.26           | 36.45           | 36.64           | 36.83           | 37.02           |
| Max. power current     | Imp A           | 13.16           | 13.24           | 13.32           | 13.40           | 13.48           | 13.56           |
| Open circuit voltage   | Voc V           | 42.54           | 42.73           | 42.92           | 43.11           | 43.3            | 43.49           |
| Short circuit current  | Isc A           | 13.83           | 13.92           | 14.01           | 14.1            | 14.19           | 14.28           |
| Module Conversion Eff. | %               | 21.9%           | 22.1%           | 22.4%           | 22.6%           | 22.8%           | 23.1%           |

\* Under Standard Test Condition(1,000W/m<sup>2</sup>,25°C,AM 1.5): Power Tolerance ±3%, Voc Tolerance ±3%, Isc Tolerance ±3%  
\* Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m<sup>2</sup>) x 1000 (w/m<sup>2</sup>))] x 100%

### General Data

|                  |                                                                                             |
|------------------|---------------------------------------------------------------------------------------------|
| Cell type        | Monocrystalline<br>N-Type solar cell                                                        |
| Cell per module  | Mono-crystalline silicon<br>N-Type solar cell (120 pcs)                                     |
| Front            | PV Coated glass                                                                             |
| Encapsulant Film | Low water vapor transmission<br>rate (WVTR) material                                        |
| Rear             | Backsheet (Inner side foil black)                                                           |
| Frame            | Composites material frame                                                                   |
| Junction Box     | IP68<br> |
| Connector        | EVO-2 Compatible                                                                            |
| Cable            | 1500mm / 12 AWG / 4mm <sup>2</sup>                                                          |

### Temperature Coefficient

|                   |      |       |        |
|-------------------|------|-------|--------|
| Nominal Operating | NOCT | °C    | 45±2   |
| Cell Temperature  |      |       |        |
| TC Isc            | α    | %/ °C | 0.045  |
| TC Voc            | β    | %/ °C | - 0.25 |
| TC Pmax           | γ    | %/ °C | - 0.29 |


### Operation Conditions

|                                                      |              |
|------------------------------------------------------|--------------|
| Max. system voltage                                  | 1500V        |
| Module fire resistance class                         | Class C      |
| Protection Class (IEC 61140)                         | Class II     |
| Series fuse rating                                   | 30 A         |
| Number of bypass diodes                              | 3            |
| Temperature range                                    | -40 to +85°C |
| Max. mechanical load                                 | 5400 pa      |
| * Please follow installation manual provided by TSEC |              |

### Module Dimensions and Weight

|           |                     |
|-----------|---------------------|
| Dimension | 1908 x 1134 x 35 mm |
| Weight    | 23.5±5% Kg          |

### IV Curve


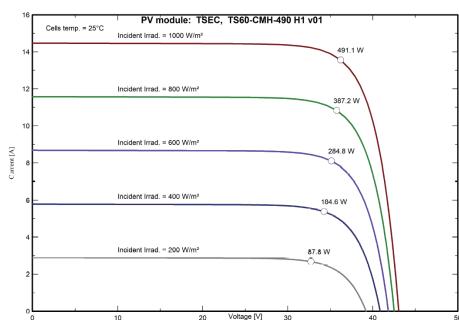


### Certifications

- IEC 61215:2021、IEC 61730-1:2021 & IEC 61730-2:2021、UL 61730
- ISO 9001:2015 Quality management system
- ISO 14001:2015 Environmental management system
- ISO 45001:2018 Occupational health and safety management system



### Engineering Drawing(mm)

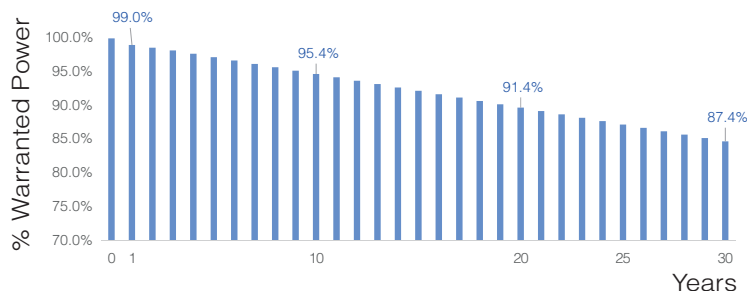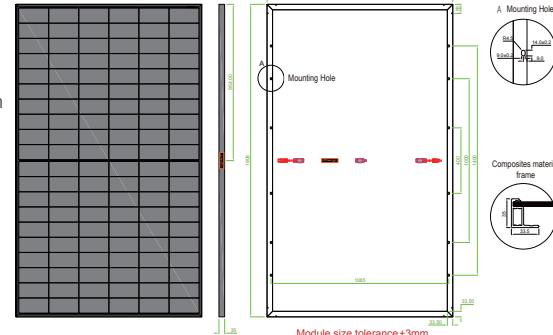

### Warranty

- 12-year materials and workmanship warranty
- 30-year linear power warranty

Made in Taiwan

\* The information in this document is subject to change without notice

\* TSEC reserves the rights of final interpretation and revision of datasheet

\* Version : Rev.15, June 2025

### TSEC Corporation

Taipei Headquarters I 8F., No.225, Sec3, Beixin Rd., Xindian Dist., New Taipei City 23143, Taiwan, R.O.C

T +886-2-2912-2199 F +886-2-2917-5399 M international.sales@tsecpv.com(Sales Contact) epc@tsecpv.com(EPC Construction Service)